


# THICKNESS GAUGE with COLOR SLEEVES

Please choose from white, black and green.



CS-65M (white)

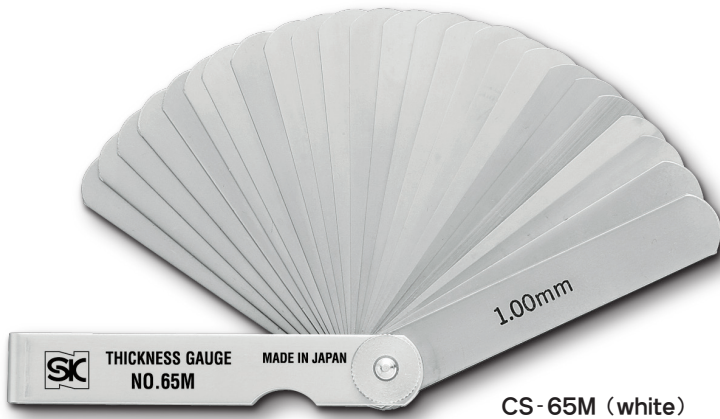

CS-65M (black)



CS-65M (green)

Use for precise spacing inspection by inserting into the gap between two flat surfaces

- Indispensable for measuring the gap between piston and cylinder of automotive engine
- Leaf width 12.7mm

**MATERIAL** Carbon tool steel

### ACCURACY

Leaf size (mm)	Tolerance(mm)
0.01 – 0.06	±0.005
0.07 – 0.10	±0.01
0.11 – 0.35	±0.015
0.40 – 0.60	±0.02
0.70 – 3.00	±0.035

### Size List

Model No.	Leaf Length (mm)	Pieces/ Set	Nominal Size (mm)	Weight
CS-172MA	75	9	0.30 0.04 0.05 0.06 0.07 0.08 0.10 0.15 0.20	30g
CS-172MB	100			30g
CS-172MC	150			50g
CS-172MD	230			70g
CS-172ME	300			90g
CS-100MR	100	10	0.03 0.04 0.05 0.08 0.10 0.15 0.20 0.25 0.30 0.40	40g
CS-150MR	150			60g
CS-100MK	100	10	0.01 0.02 0.03 0.04 0.05 0.06 0.07 0.08 0.09 0.10	30g
CS-150MK	150			40g
CS-60M	75	19	0.03 0.04 0.05 0.06 0.07 0.08 0.09 0.10 0.15 0.20 0.25 0.30 0.35 0.40 0.45 0.50 0.70 0.80 1.00	60g
CS-100MY	100			80g
CS-150MY	150			120g
CS-65M	75	25	0.03 0.04 0.05 0.06 0.07 0.08 0.09 0.10 0.11 0.12 0.13 0.14 0.15 0.20 0.25 0.30 0.35 0.40 0.45 0.50 0.60 0.70 0.80 0.90 1.00	80g
CS-100MZ	100			100g
CS-150MZ	150			150g
CS-72M	75	12	0.04 0.05 0.06 0.07 0.08 0.10 0.15 0.20 0.30 1.00 2.00 3.00	70g
CS-100MT	100			100g
CS-150MT	150			140g
CS-100ML	100	19	0.01 0.02 0.03 0.04 0.05 0.06 0.07 0.08 0.09 0.10 0.20 0.30 0.40 0.50 0.60 0.70 0.80 0.90 1.00	80g
CS-150ML	150			120g
CS-80M	75	13	0.03 0.04 0.05 0.06 0.07 0.08 0.10 0.15 0.20 0.30 1.00 2.00 3.00	60g
CS-100MX	100			90g
CS-150MX	150			140g
CS-100MH	100	10	0.10 0.20 0.30 0.40 0.50 0.60 0.70 0.80 0.90 1.00	80g
CS-150MH	150			110g

Other color variation are also available,

Please contact us with request

